


LETTERA DI RIFERIMENTO	VALORE QUOTA (mm)
A	33
B	50
ØC	4.2
D	90
E	29

CARATTERISTICHE TECNICHE


Parameter	Conditions	Model					Unit
		±5	±10	±30	±60	±90	
Measuring range		±5	±10	±30	±60	±90	
Measuring axes		X,Y	X,Y	X,Y	X,Y	X,Y	
Resolution		0.001	0.001	0.001	0.001	0.001	
Absolute accuracy		0.005	0.005	0.01	0.02	0.05	
Long term stability		0.01	0.01	0.02	0.05	0.08	
Zero temperature coefficient	-40÷85°C	±0.002	±0.002	±0.002	±0.002	±0.002	
Sensitivity temperature coefficient	-40÷85°C	≤50		≤50	≤50	≤100	
Power on time		0.5	0.5	0.5	0.5	0.5	
Response time		0.05	0.05	0.05	0.05	0.05	
Output rate		5Hz – 15Hz - 35Hz – 50Hz can be setting					
Output signal		RS232/RS485/RS422/TTL/CAN/MODBUS					
EMC		According to EN61000 and GBT17626					
MTBF		≥50000 hours/time					
Insulation resistance		≥100M					
Shockproof		100g@11ms – 3times/axis (half sinusoid)					
Anti-vibration		100grms - 10÷1000Hz					
Protection glass		IP67					
Cables		Standard 1m length – wearproof – wide temperature Shielded cables 4*0.4 mm ² air-plug connector					
Weight		150 g (without cable)					

Al fine di migliorare le prestazioni tecniche del prodotto, la società si riserva di apportare variazioni senza preavviso.
In order to improve the technical performances of the product, the company reserves the right to make any change without notice.

CONNESSIONI ELETTRICHE

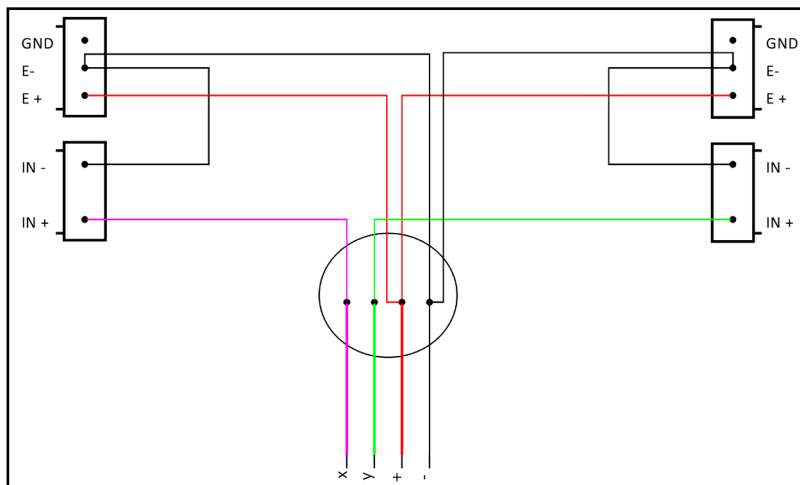

Connessioni modello C con output 4-20 mA

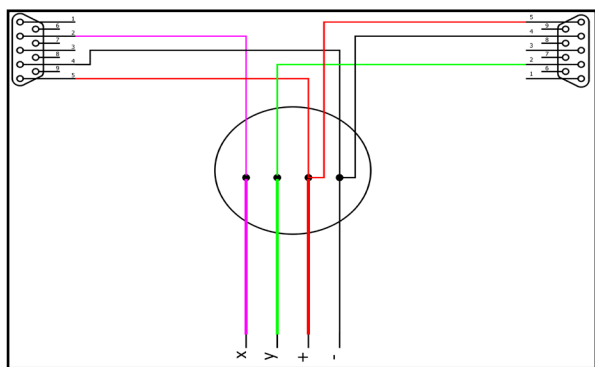

Connessioni modello T con output 0-5 V

CODIFICA PER ORDINE:

Esempio: *Inclinometro HCAP - 5 - 1AX - T*

<i>Inclinometro HCAP</i>	-	5	-	1AX	-	T
--------------------------	---	---	---	-----	---	---

Range $\pm 5^\circ$	5	↑
Range $\pm 10^\circ$	10	
Range $\pm 30^\circ$	30	
Range $\pm 60^\circ$	60	
Range $\pm 90^\circ$	90	
Mono-assiale	1AX	↑
Bi-assiale	2AX	
Output 0-5 V	T	↑
Output 4-20 mA	C	

Al fine di migliorare le prestazioni tecniche del prodotto, la società si riserva di apportare variazioni senza preavviso.
In order to improve the technical performances of the product, the company reserves the right to make any change without notice.